



Motorola V2397 Keypad Replacement

If your keypad starts to deteriorate follow this guide

Written By: Connor




Step 1 — Battery



- Press and hold the button on the battery cover
- Pull the battery cover down and out to remove it

Step 2

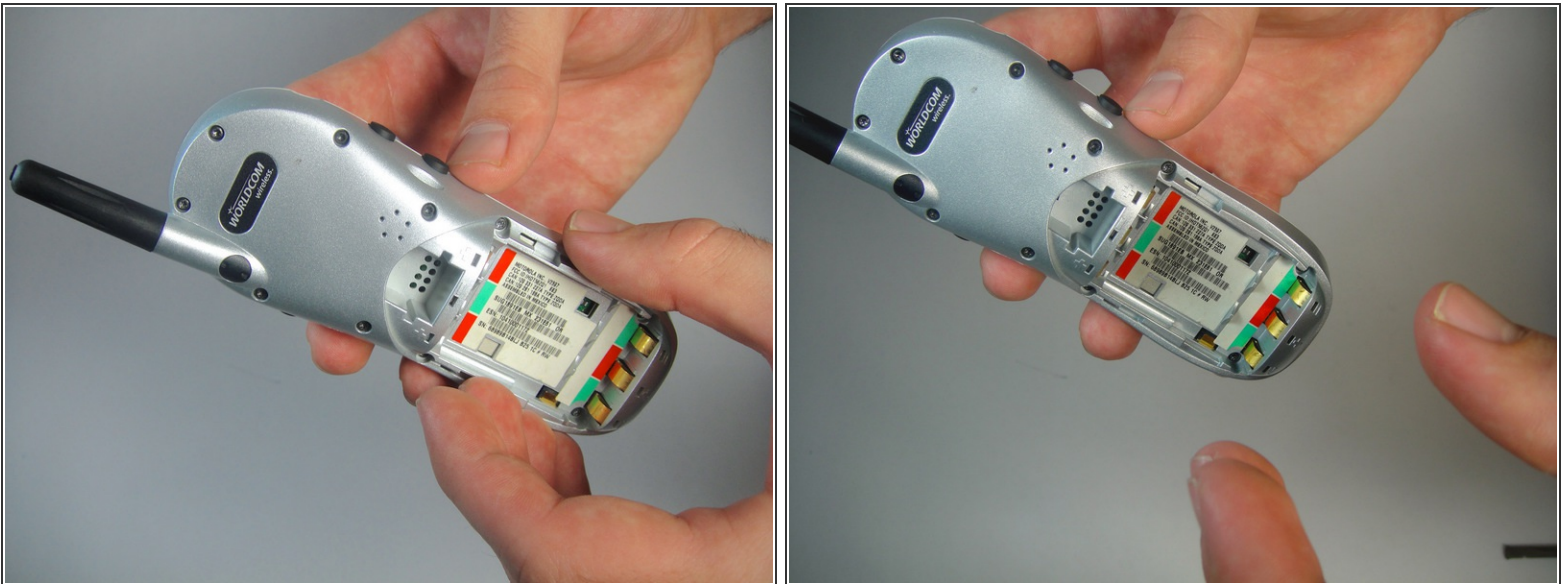



- Remove the batteries by pulling them away from the phone

Step 3 — Back Cover





- Using the Torx T4 screwdriver remove the six screws highlighted in the picture to the left

Step 4

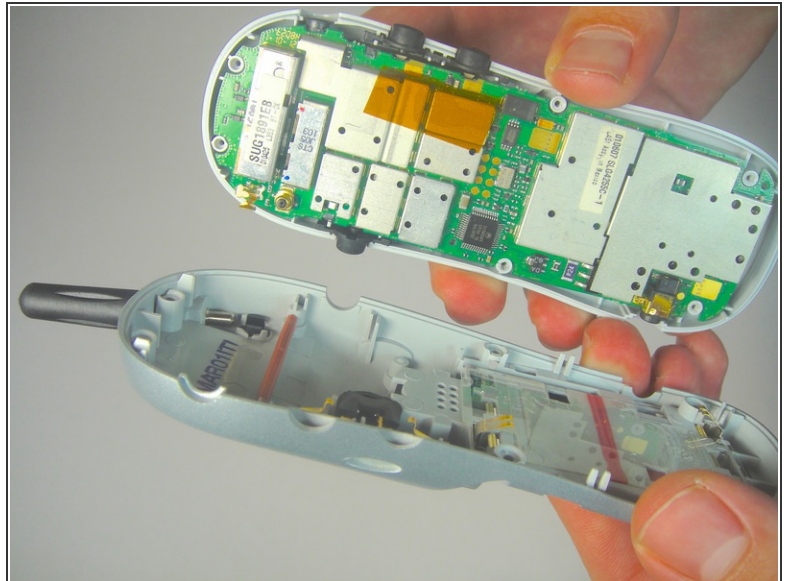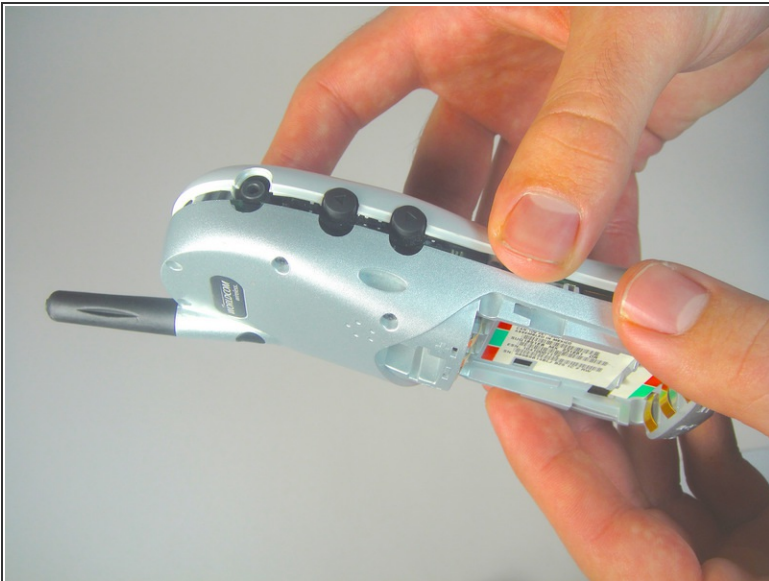



- Use your fingers or a spudger to remove the back cover

Step 5 — Side Buttons

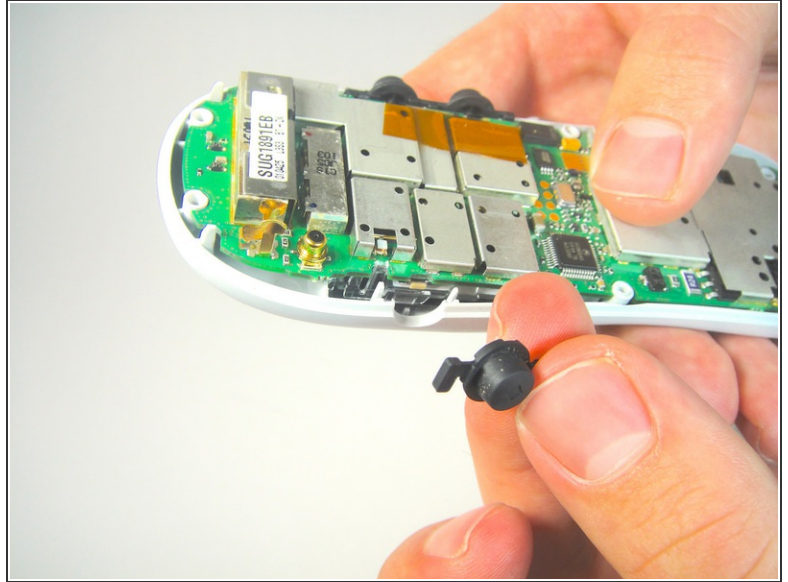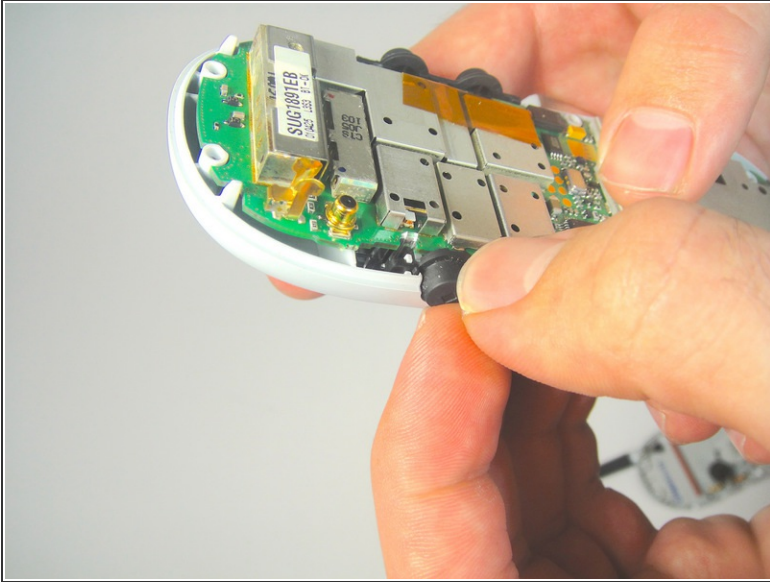


- Lift and remove buttons by hand

Step 6 — Phone

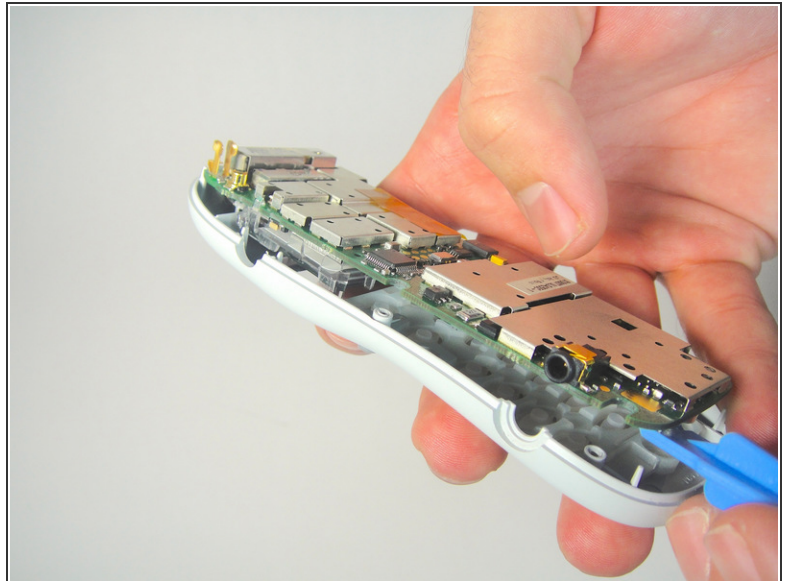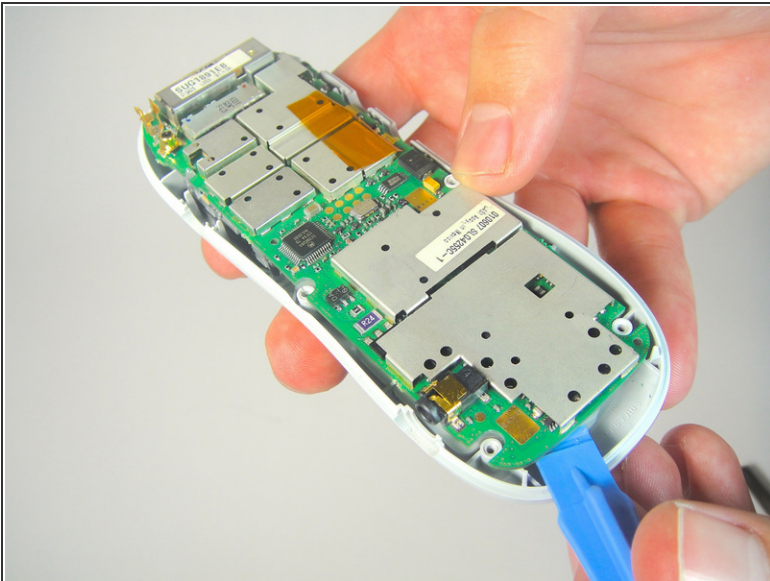

- Place your plastic opening tool in between the motherboard and the front cover of the phone
- Apply a small force to lift the motherboard away from the front cover

Step 7 — Keypad

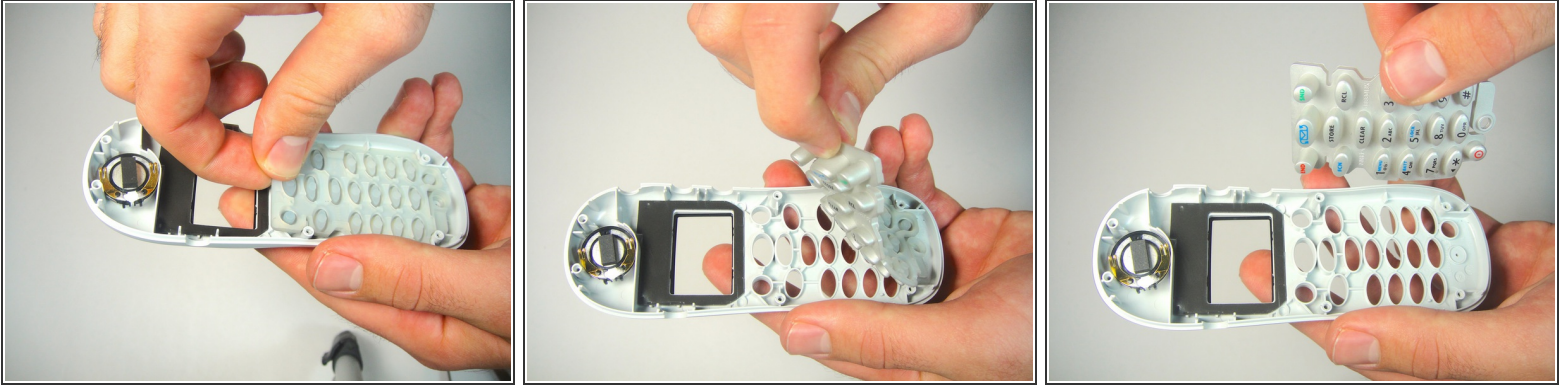

- Grip the top of the rubber keypad with your thumb and index finger
- While holding the keypad start to peel it back from the front cover until the keypad is completely detached

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-26 08:37:58 AM.